CORONA STREET LED EVO RM1 6650LM I KL. IP66 740 SP10KV (47W)

STREET LIGHTING

LED




220-240 V 50-60 Hz | LED | IP66 | IK08

TECHNICAL PARAMETERS

Index:	644672
Ingress protection:	IP66
Impact resistance:	IK08
Nominal power [W]:	47
Luminous flux [lm]*:	6600
Colour temperature [K]:	4000
SDCM:	≤ 3
Colour rendering index:	>70
Electrical protection class:	I
Energy efficiency class:	A++

*Tolerance +/- 10%

LIGHT CURVES

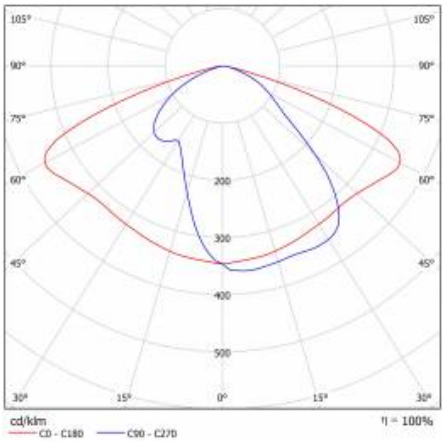

CHARACTERISTICS

Road LED fitting with integrated energy-saving LED module and high luminous flux. The body and handle has been made out of die cast aluminum, powder painted in gray (RAL9006). Accessory cover made out of plastic. The fitting uses directional lens matrices made of PMMA, available versions: RM1 (Road Medium 1), RW1 (Road Wide 1). Lampshade is made out of hardened glass. IP66 ingress protection class and IK08 impact-rating features make this fitting extremely tight and shock-resistant (vandal-resistant). Integrated, step-regulated grip allows to set the fitting. Beam angle adjustment: 0° to +15° (peak to pole); -15° to 0° (side to boom). Options: First class protection, DALI and LineSwitch control, ability to program 5-step power reduction, CLO - maintaining luminous flux in time. Equipped with surge protection SP10kV as standard.

APPLICATION

This road fitting is designed to be used in open areas for lighting: highways, expressways, streets, local roads, crossroads and car-parks.

CORONA STREET LED EVO RM1 6650LM I KL. IP66 740 SP10KV (47W)

STREET LIGHTING

LED

TECHNICAL PARAMETERS TABLE

Light source:	LED module
Nominal power [W]:	47
Rated power of the luminaire [W]:	47
Supply voltage [V]:	220-240
Luminous flux [lm]:	6600
Luminous efficacy [lm/W]:	140
Energy efficiency class:	A++
Electrical protection class:	I
Colour temperature [K]:	4000
Colour rendering index:	>70
SDCM:	≤ 3
Power factor:	0.93
Surge protection [kV]:	10
Diffuser material:	glass
Diffuser colour:	transparent
Optics material:	PMMA
Optics:	matrix lens
Material of the body:	aluminium
Colour of the body:	grey
Dimensions [mm]:	648/262/128
Mounting dimensions [mm]:	ø60
Impact resistance:	IK08
Ingress protection:	IP66

Mounting version:	on the pole
Working temperature [°C]:	from -20 to +35
Beam angle adjustment [°]:	0 to +15 (peak to pole); -15 to 0 (side to boom)
Surface of wind resistance [m2]:	0.020
Number on the palette [pcs]:	18
Net weight of the luminaire [kg]:	4.300
CE certificate:	130/2018
Index:	644672
EAN:	5905963644672
Category type:	street lighting
Category of application:	parkings and bicycle paths
Version:	RM1
Luminaire rated power Omin [W]:	47.20
LED lifespan L90B10 [h]:	100000
Light distribution type:	RM1
Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
ENEC Certificate:	BBJ/004/2019
ETIM class:	EC000062
Warranty [years]:	5
Manual:	Download PDF

*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2020-05-29

Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl

The luminaire complies with the EU ROHS Directive 2011/65/UE

This product is a subject to electric and electronic waste equipment regulations (WEEE).

130/2018