EN

AVENIDA HERITAGE LENS LED

Group in catalogue: NEW PRODUCTS

220-240V 50/60 Hz | IK 10 | IP 66 | LED

130335.5L012.162
AVENIDA HERITAGE LENS LED S version ED 19W 2450lm 3000K IP66 033 - for recreational areas graphite II

Stylized park luminaire, based on the architecture of AVENIDA LED luminaires and referring in character to classic decorative luminaires.



TECHNICAL DATA

Mounting: suspended on a mounting tube with diameter ø42
Body: high pressure die-cast aluminum
Lateral Surface Wind Exposed: 0,088 m^2
Colour: graphite
Operating temperature range [°C]: -40 ... +55

ELECTRICAL DATA

Power supply efficiency: >89%
Power: 220-240V 50/60Hz
Includes light source: yes
Output current [mA]: 350
Type of equipment: ED
Light source / lamp: LED
Electrical connection: luminaire equipped with 2x1,5 mm^2 wire with a length of 7 m - S version
Maximum number of luminaires in the circuit with a 16A fuse (B): 21

OPTICAL DATA

Light distribution: symmetrical-elliptic
Way of lighting: direct
Type of optic: 033 - for recreational areas
Diffuser: polycarbonate
CRI/Ra: >70
Lumen luminaire [lm]: 2450
Colour temperature [K]: 3000
ULOR / DLOR: 2,8/97,2

GENERAL DATA

Lifetime (L90B10): 100 000 h
Available on request: 10kV surge protection, NTC, NEMA connector, ZHAGA connector
Warranty: 5 years
Application: avenues, sidewalks, parks, residential, public spaces, Railway stations, facades, promenade, roads, residential area roads
Additional information: photobiological risk group RG0
Other remarks: the pole is not part of the luminaire

CERTIFICATES, COMPLIANCES

Energy class: A+
Photobiological risk group: RG0

Code	Type of equipment	Type of optic	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	ULOR / DLOR	Operating temperature range [°C]	LED lifetime [h]
130335.5L012.162	ED	033 - for recreational areas	19	2450	129	3000	>70	2,8/97,2	-40 ... +55	(L90B10) 100 000

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.
Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for Ta=25°C.
The operating temperature ranges apply only to luminaires used in the outdoor environment.
Colour temperature tolerance +/- 5%.


The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

EN

AVENIDA HERITAGE LENS LED

Group in catalogue: NEW PRODUCTS

Code	Dimensions [mm] L H	Pallet quantity	Quantity in package	Net weight [kg]
130335.5L012.162	561 426	12	1	4,9

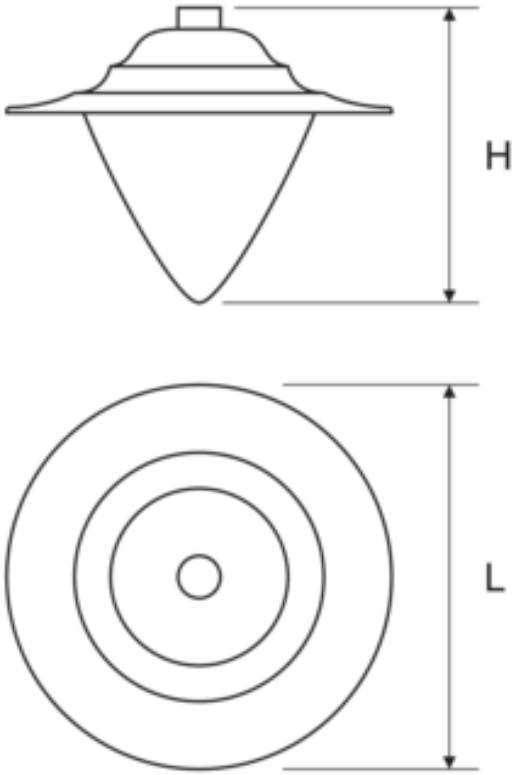

ACCESSORIES



150245.01095
150242.01094

Louver for AVENIDA HERITAGE LED luminaires



150170.01135 Template

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.
Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for Ta=25°C.
The operating temperature ranges apply only to luminaires used in the outdoor environment.
Colour temperature tolerance +/- 5%.


The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

EN

AVENIDA HERITAGE LENS LED

Group in catalogue: NEW PRODUCTS

LIGHT BEAM CURVES

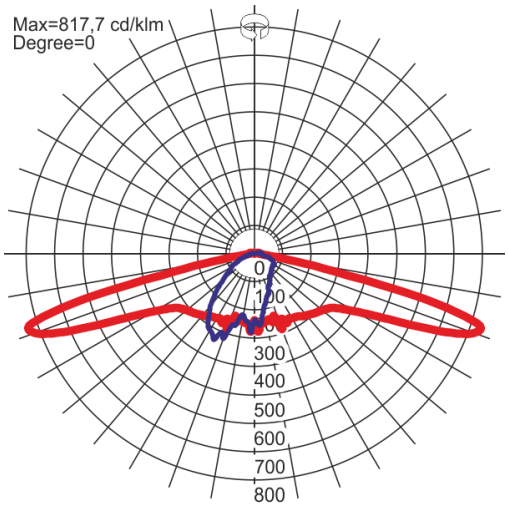

WAY OF LIGHTING



Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.
Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com
Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.
The parameters in the data sheet are given for Ta=25°C.
The operating temperature ranges apply only to luminaires used in the outdoor environment.
Colour temperature tolerance +/- 5%.

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires