

6060 - MINI



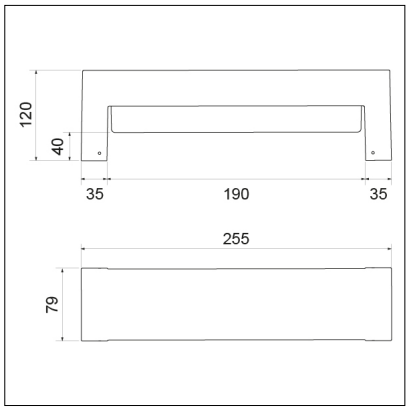



6060.56X

QUALITY MARKS

CE

CL I

IP66

F

COLOURS

White X=2

Silver X=4

Anthracite X=9

BELT


It is available in 2 different sizes.
Constructed of:


- Painted die-cast aluminium body
- Polycarbonate diffuser
- Aluminium reflector
- Silicon gaskets
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders


6060 - MINI

Code	Light source	Power	Lum. Flux *	Colour Temperature
6060.55X	LED	9W	1240 lm	4000 K
6060.56X	LED	9W	1160 lm	3000 K

* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance


Wall mounting


Single power supply cables input



LED:
LED's direct operation at 220/240V 50/60Hz. No power supply is required.



Impact Energy (J):
10