
5050



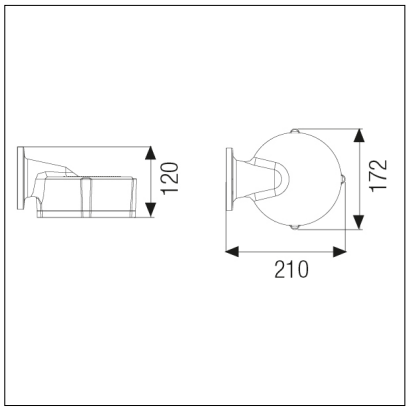

QUALITY MARKS

CE

CL I

IP65

F

COLOURS

Silver X=4

Anthracite X=9

DIG

Wall outdoor luminaire constructed of:


- Painted die-cast aluminium body
- Satin tempered glass diffuser
- Aluminium reflector
- Silicon gaskets
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders

BOLUCE ILLUMINAZIONE


5050

Code	Light source	Power	Lum. Flux *	Colour Temperature
5050.66X	LED	10W	1250 lm	4000 K
5050.67X	LED	10W	1250 lm	3000 K


* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance



Wall mounting



Single power supply cables input



LED:
LED's direct operation at 220/240V 50/60Hz. No power supply is required.



Impact Energy (J):
0,7