

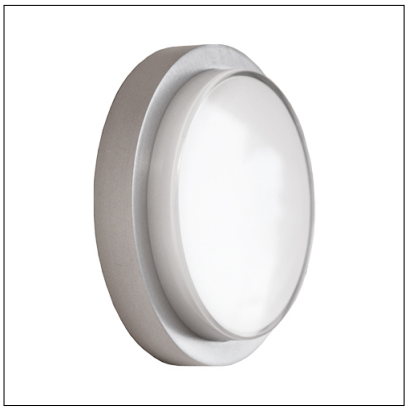


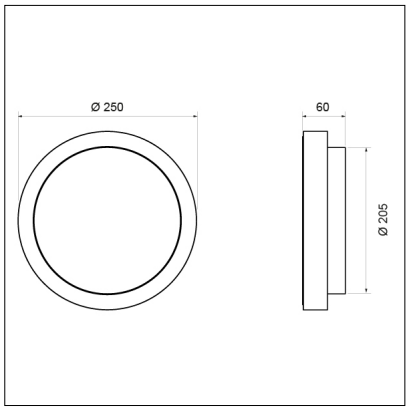



1310.66X

QUALITY MARKS

CE

CL I

IP65

F

COLOURS

Silver X=4

Anthracite X=9


GAIA


Outdoor and/or indoor luminaire constructed of:


- Painted die-cast aluminium structure
- Glass diffuser
- Silicon gaskets
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders


Code	Light source	Power	Lum. Flux *	Colour Temperature
1310.66X	LED	12,9W	1500 lm	4000 K
1310.67X	LED	12,9W	1500 lm	3000 K

* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance


Wall mounting


Ceiling mounting


Double power supply entry cables



LED:
LED's direct operation at 220/240V 50/60Hz. No power supply is required.



Impact Energy (J):
0,7



On request