
3878 - H 900



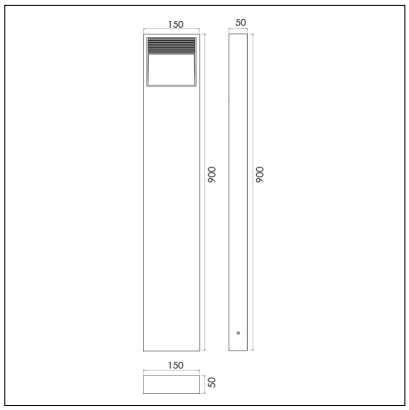

QUALITY MARKS

COLOURS

Silver X=4

Anthracite X=9

LID WALL STELO


Outdoor post lu minaireconstructed of:

- Painted die-cast aluminium body
- Painted stainless steel AISI 430 post
- Satin glass diffuser
- Silicon gaskets
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders

3878 - H 900

Code	Light source	Power	Lum. Flux *	Colour Temperature
3878.66X	LED	5 W	580 lm	4000 K
3878.67X	LED	5 W	540 lm	3000 K


* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance




Floor mounting



The direct light emission is in full compliance with standard light pollution directives.



Single power supply cables input



LED:
LED's direct operation at 220/240V 50/60Hz. No power supply is required.



Impact Energy (J):
20