



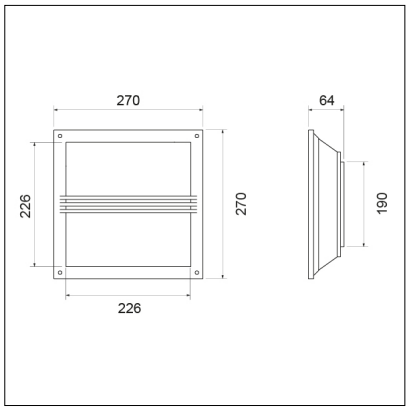



4025.25X

QUALITY MARKS

CE

CL I

IP65

F

COLOURS

Silver X=4

Anthracite X=9


MAYA


Outdoor and/or indoor luminaire constructed of:


- Painted die-cast aluminium structure
- Polycarbonate diffuser
- Aluminium reflector
- Silicon gasket
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders


Code	Light source	Power	Lum. Flux *	Colour Temperature
4025.25X	LED	19,5W	2510 lm	4000 K
4025.26X	LED	19,5W	2350 lm	3000 K

* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance


Wall mounting


Ceiling mounting


Single power supply cables input



LED:
LED's direct operation at 220/240V 50/60Hz. No power supply is required.



Impact Energy (J):
1