



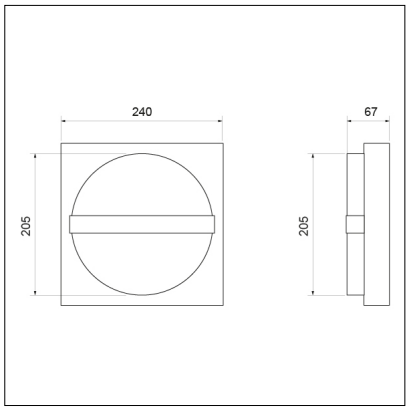



1308.45X

QUALITY MARKS

CE

CL I

IP65

F

COLOURS

Silver X=4

Anthracite X=9

PACK

Outdoor and/or indoor luminaire constructed of:


- Painted die-cast aluminium body
- Stainless steel AISI 316 cover for art. 1400
- Die-cast painted aluminium cover for art. 1405-1408-1305-1308
- Glass diffuser
- Aluminium reflector
- Silicon gaskets
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders


NOTES


Die-cast aluminium cover.


Code	Light source	Power	Lum. Flux *	Colour Temperature
1308.45X	LED	12,9W	1500 lm	4000 K
1308.46X	LED	12,9W	1500 lm	3000 K

* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance


Wall mounting


Ceiling mounting


Double power supply entry cables



LED:
LED's direct operation at 220/240V 50/60Hz. No power supply is required.



Impact Energy (J):
0,7



On request