

5182 - H 460

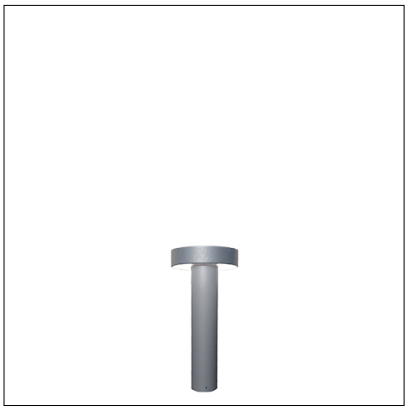

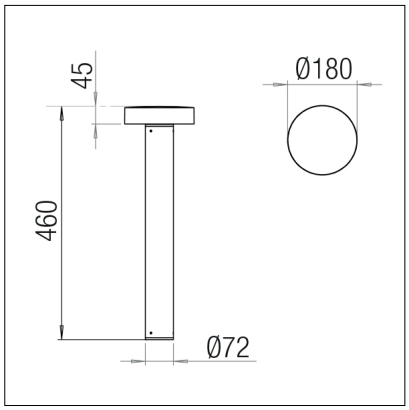

QUALITY MARKS

CE

CL I

IP65

F

COLOURS

Black X=3

Silver X=4

Anthracite X=9


PIN

Outdoor luminaire constructed of:
• Painted extruded aluminium post
• Painted die-cast aluminium head
• Glass diffuser
• Silicon gasket
• Stainless steel screws
• Painting using high resistance to UV and corrosion polyester powders

5182 - H 460

Code	Light source	Power	Lum. Flux *	Colour Temperature
5182.66X	LED	25W	3020 lm	4000 K
5182.67X	LED	25W	2880 lm	3000 K

* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance




Floor mounting




Root-mount ground fixing enclosed



The direct light emission is in full compliance with standard light pollution directives.



Double power supply entry cables




LED:
The luminaire is supplied with a 220/240V 50/60Hz built-in power supply.



Impact Energy (J):
2



On request
Available with CASAMBI wireless control technology.



TR 5180:
OPTIONAL
Flange: accessory for post