
BOLUCE ILLUMINAZIONE

7024





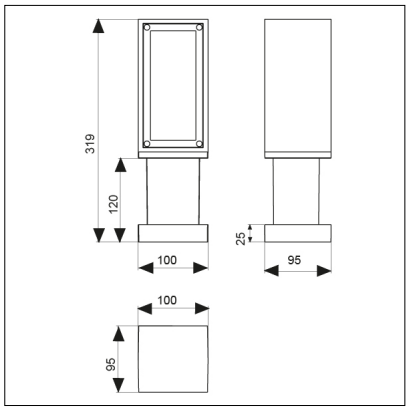

QUALITY MARKS

CE

CL I

IP65

F

COLOURS

Silver X=4

Anthracite X=9

SHARP STELO

Ground outdoor luminaire, available with mono-direction or double-direction light constructed of:

- Painted die-cast aluminium body
- Satin glass diffuser
- Aluminium reflector
- Silicon gaskets
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders

NOTES


Double direction light

BOLUCE ILLUMINAZIONE


7024

Code	Light source	Power	Lum. Flux *	Colour Temperature
7024.66X	LED	2x9W	2x1240 lm	4000 K
7024.67X	LED	2x9W	2x1160 lm	3000 K


* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance



Floor mounting



Single power supply cables input



LED:
LED's direct operation at 220/240V 50/60Hz. No power supply is required.



Impact Energy (J):
2