
1086 - RING



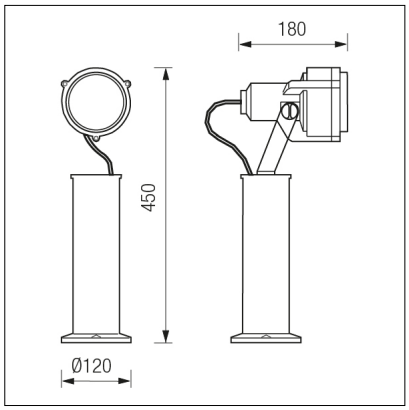

QUALITY MARKS

CE

CL I

IP65

F

COLOURS

Silver X=4

Anthracite X=9

SPARK STELO


Outdoor post luminaire constructed of:

- Painted die-cast aluminium spotlight
- Painted extruded aluminium post
- Transparent tempered glass diffuser
- Aluminium reflector
- Silicon gaskets
- Stainless steel screws
- Painting using high resistance to UV and corrosion polyester powders


1086 - RING

Code	Light source	Power	Lum. Flux *	Socket	Colour Temperature	Beam angle	Notes
1086.45X	LED	17,6W	2270 lm		4000 K		
1086.46X	LED	17,6W	2125 lm		3000 K		
1086.06X	PAR30 LED	10W	940 lm	E27	3000 K	25°	Bulb enclosed to the luminaire LED PAR 30

* Lumen rating is related to the flux emitted by the LED module and not to the flux emitted by the appliance




Floor mounting



LED:
LED's direct operation at 220/240V 50/60Hz. No power supply is required.



Impact Energy (J):
2



Minimum distance from lighted objects.